


FOR REFERENCE ONLY

RADIAL / STRAIGHT BELT
 (INSIDE RADIUS = 2.2 x OVERALL BELT WIDTH)
 ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED

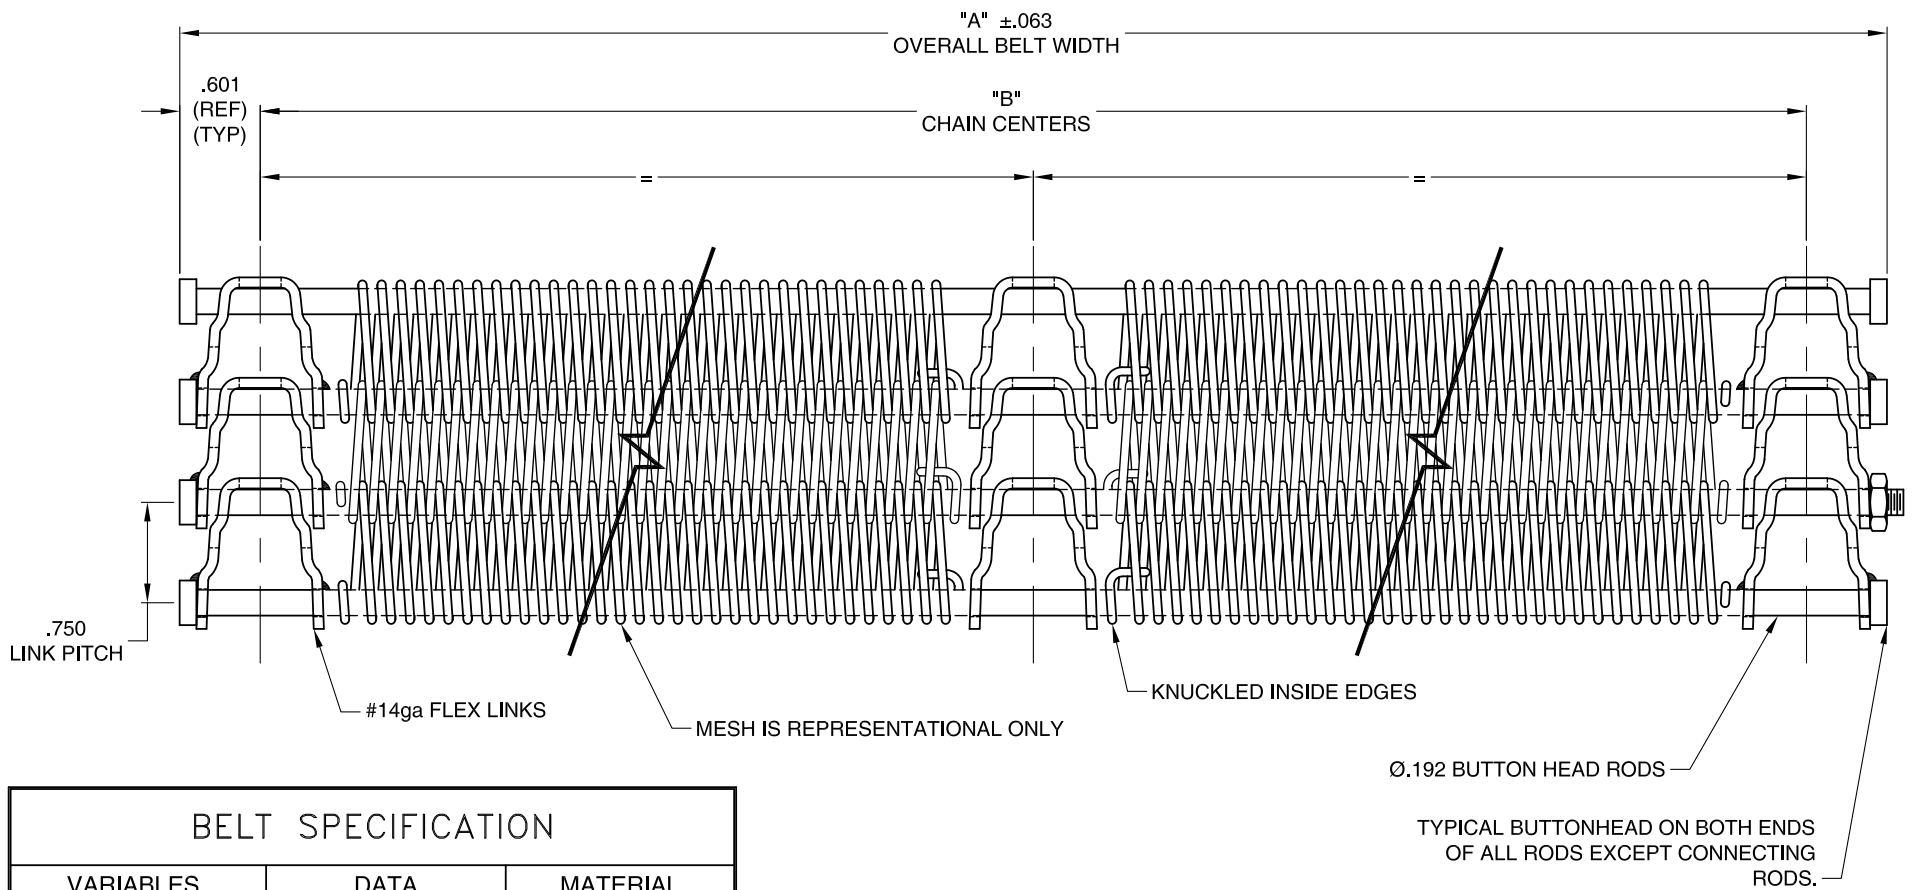

BELT SPECIFICATION		
VARIABLES	DATA	MATERIAL
"A"		
"B"		
MESH SPEC		
NOTES:		
PLEASE CIRCLE CRITICAL DIMENSION		
"A"	"B"	

NOTES:
 1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

NOTICE:
 THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.

ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

CUSTOMER INFORMATION	
P.O. #	
W.O.#	QUOTE#
TOLERANCE UNLESS OTHERWISE SPECIFIED	
DECIMAL .X ±.03 .XX ±.015 .XXX ±.005 .XXXX ±.0005	FRACTIONAL ± 1/16 ANGULAR ± 1/2°

	WIRE MESH BELT COMPANY 170 SUMMERLEA ROAD, BRAMPTON, ONTARIO L6T 4X3 www.wiremeshbelt.com *CUSTOM WOVEN BELTS SINCE 1966*	
	TITLE 3/4" x 14ga FLEX LINK BELT 3 ROWS-RADIAL/STRAIGHT RUN	REV 0
DATE	06/17/03	DRAWING
DRAWN BY	MP	FL1475-3R